
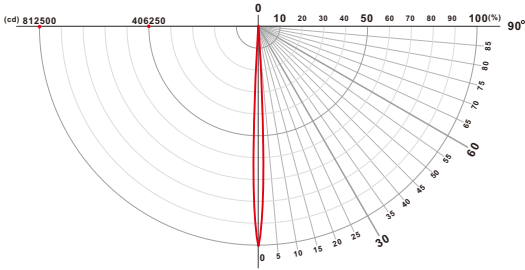


LED SEARCHLIGHT

YS00-SL03

- IP66, Salt spray test and Vibration test compliance.
- Compatible with harsh environments to demonstrate the marine performance required for ship lighting.
- Long lifespan up to 40,000 hours.
- It is a high-brightness LED component that reduces power consumption to 1/10 the power of traditional lighting, reducing engine load and significantly reducing the fuel cost of power generation.

※ The value of power consumption reduction will vary depending on the product.

Product	Part No.	Specification			
<p>Lumileds Led 810000cd</p> 	YS00-SL03	Power Consumption	110W	Luminous Flux	13800Lm
		Dimension	420×316×207mm	Equivalent to conventional products	1000W
		Weight	9.7kg±10%	CRI	Ra 75
		Input Voltage	AC 100V-240V	CCT	5000K
		Operating Temperature	-25°C~+50°C	Beam Angle θ	5°
		IP code	IP 66	Lux@25m	1300Lux/25m
		Frequency Range	50Hz/60Hz (47Hz~63Hz)	Lifespan	40000h
<p>International Standards</p> <ul style="list-style-type: none"> ■ CNS 3912 Photometric test ■ CNS 14335 / 14165 IP66 ■ CNS 10255 Vibration test ■ CNS 8886 Salt spray test 					
 <p>Beam width: 1.1m 1300 lux in center</p> <p>Beam width: 4.4m 81.3 lux in center</p> <p>Beam width: 8.7m 20.3 lux in center</p> <p>Beam Angle θ = 5°</p>		<p>Wiring Diagram</p> 