
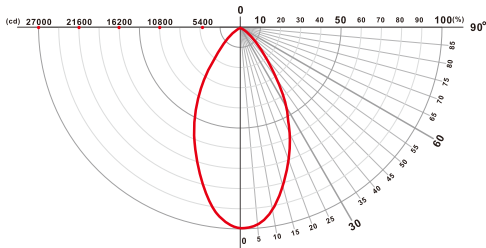


LED CARGO LIGHT

• To replace NHT-400*2/MT400BH*2
NHT-1000/MT1000BH

YU00-SL03

- IP66, Salt spray test and Vibration test compliance.
- Long lifespan up to 20,000 hours.
- Design according to Rules for the Construction and Classification of Steel Ships.
- Meet standard of JIS F 8442 and CNS10258.
- Noticeable reduce the fuel cost.
- Can be used in bad environment safely and stably.

Product	Part No.	Specification															
<p>Nichia Led</p>   <table border="1" data-bbox="199 1422 550 1624"> <tr> <td>Beam width: 1.2m</td> <td>27000 lux in center</td> <td>1m</td> </tr> <tr> <td>Beam width: 3.5m</td> <td>3000 lux in center</td> <td>3m</td> </tr> <tr> <td>Beam width: 6.9m</td> <td>750 lux in center</td> <td>6m</td> </tr> <tr> <td>Beam width: 10.3m</td> <td>333 lux in center</td> <td>9m</td> </tr> </table> <p>Beam Angle $\theta = 60^\circ$</p>	Beam width: 1.2m	27000 lux in center	1m	Beam width: 3.5m	3000 lux in center	3m	Beam width: 6.9m	750 lux in center	6m	Beam width: 10.3m	333 lux in center	9m	<p>YU00-SL03</p>	Power Consumption	200W	Luminous Flux	35500Lm
	Beam width: 1.2m	27000 lux in center	1m														
	Beam width: 3.5m	3000 lux in center	3m														
	Beam width: 6.9m	750 lux in center	6m														
	Beam width: 10.3m	333 lux in center	9m														
	Dimension	505x490x236mm	CRI	Ra 75													
	Weight	16.6kg \pm 10%	CCT	5000K													
Input Voltage	AC 100V-240V	Beam Angle θ	60°														
Operating Temperature	-25°C~+50°C	Lux@1m	27000														
IP Code	IP 66																
<p>International Standards</p> <ul style="list-style-type: none"> ■ CNS 14335 / 14165 IP66 ■ CNS 15233 Vibration test ■ CNS 8886 Salt spray test 																	
<p>Wiring Diagram</p> 